


OECC/IOOC 2001 Conference
incorporating 26th Australian Conference on Optical Fibre Technology
Sydney, 1-5 July 2001

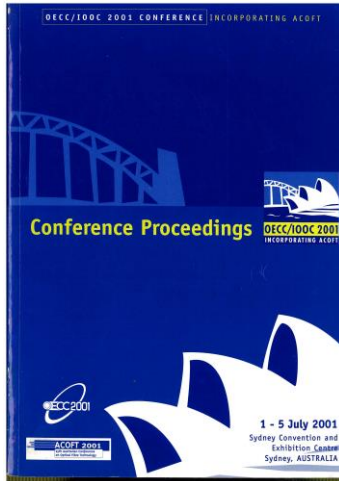

Proceeding were published by Engineers Australia

ISBN: 0 646 41752 5

The Australian Optical Society (AOS) has digitised the contents/index pages of this conference*.

The conference volume contains the individual papers, and is held by one or more libraries in Australia; please refer to the website:

<http://optics.org.au/ACOFT>

| Authors | Paper title | Page |
|---|--|-------|
| S. Poole | Optical components: The driver of systems developments | PL I |
| T. Nakahara | Optical fiber communication in the future IT era | PL II |
| C. Howells | Commercialisation of photonics in Australia - the Redfern perspective | PL VI |
| C.-H. Lee | Invited bi-directional WDM ring network | 1 |
| J.P. Blondel, E. Brandon & O. Courtois | WDM systems with very large inter-EDFA spans | 3 |
| J. Nakagawa, M.E. Marhic & L.G. Kazovsky | 125km SMF transmission experiment employing optical 3R regeneration technique using injection-locking in a gain-switched DFB-LD | 6 |
| T. Wuth, W. Kaiser, W. Rosenkranz, G. Mohs, R. Neuhauser & C. Glingener | 200km repeaterless 10Gb/s transmission on standard single-mode fiber with single-sideband (SSB) modulation and Raman amplification | 8 |
| M. Birk, P.P. Iannone, K.C. Reichmann & N.J. Frigo | WDM virtual rings for metro and access | 10 |
| S. Hong & J.Y. Ha | Shared powering system for ATM passive optical network architecture | 12 |
| J. Yu, M. Lee, Y. Kim, Y. Lee & J. Park | Access protocol for two-level WDM optical networks using switch and passive star couplers | 14 |
| D.K. Jung, H. Kim, K.H. Han & Y.C. Chung | Simultaneous WDM and digital video transmission over spectrum-sliced bidirectional WDM PON | 16 |
| N. Minato, M. Kashima, A. Sasaki & S. Oshiba | A novel optical access system using CDM/SCM channel control | 19 |
| B.J. Eggleton | Systems applications of advanced fiber grating devices | 21 |
| S.T. Oh, C.I. Song, B.H. Lee, W.T. Han, U.C. Paek & Y. Chung | Fabrication of azimuthally symmetric long-period fiber gratings with CO ₂ laser | 22 |
| P.F. Hu, J. Canning, K. Sommer & M. Englund | Phosphosilicate glasses: A waveguide grating host for all windows? | 24 |
| J. Canning | Hypersensitisation of optical waveguides | 26 |



| | | |
|---|--|----|
| Y. Inoue & Y. Hida | Large-scale arrayed-waveguide grating | 29 |
| M. Park, G.H. Song, K. Hwang & H.J. Lee | Optimization of silica waveguide-grating routers with large channel numbers for minimal insertion-loss | 33 |
| S.G. Blanco, A. Glidle, J.H. Davies, J.M. Cooper & J.S. Aitchison | Waveguide fabrication by electron beam modification of flame hydrolysis deposited silica | 35 |
| J. Jang, E.-S. Kang & B.-S. Bae | Photosensitivity of sol-gel derived organically modified germanosilicate glass | 37 |
| M. Okuno, T. Watanabe, T. Goh, T. Kominato, T. Shibata, T. Kawai, M. Koga & Y. Hibino | Low-loss and high extinction ratio silica-based 1xn thermo-optic switches | 39 |
| M. Shtaif & A. Mecozzi | Wavelength dependence of polarization mode dispersion in optical fibers | 42 |
| R.M. Jopson, L.E. Nelson & H. Kogelnik | The impact of PMD on lightwave networks | 43 |
| W. Zhao, L. Wang, H. Wang, Y. Ji, J.C. Rasmussen, H. Ooi, G. Ishikawa & S. Hasuo | Crystal-optical higher-order PMD-emulator for 40Gbit/s systems | 45 |
| M. Hayashi, H. Tanaka & M. Suzuki | 40Gb/s demonstration of wide range PMD compensation using a polarizer | 48 |
| M. Phillips | Crosstalk in CATV WDM lightwave systems | 50 |
| E.-S. Son, H. Kim & Y.C. Chung | Scalability of directly modulated WDM/SCM systems | 54 |
| M. De Donno, V. Corio & A. Pinciola | Innovative solution for HD-WDM OADM sub-systems | 56 |
| A.V. Tran, R.S. Tucker, W.D. Zhong & N. Boland, | Efficient design of WDM ring networks with optical amplifiers | 58 |
| T. Sakano, K. Uchiyama, K. Miyamoto, T. Morioka & K. Haimoto | Linear-chirp-division-multiplexing method based on temporal imaging technique | 60 |
| D.C. Psaila, L. Reekie & S.B. Poole | Trends in optical fibre Bragg gratings | 62 |
| M. Shen, K.E. Alameh & R.A. Minasian | Linear short time delay superposed fiber Bragg grating | 64 |
| K. Murashima, M. Ohmura, K. Hashimoto, T. Shibata, M. Shiozaki, T. Iwashima, A. Ioue & H. Sugauma | Dispersion compensating multi-channel FBG with low radiation mode losses | 67 |
| R. Qu, J. Geng, G. Chen, G. Chen, G. Cao, Z. Fang & J.-P. Meunier | All-optical variable-input-fixed-output wavelength converter based on fiber Bragg grating | 69 |
| J. Ryu, E. Choi, H. Park, B. H. Lee, W.-T. Han, U.-C. Paek & Y. Chung | Characterization of fiber Bragg grating-based DFB fiber laser | 72 |
| S.-W. Ahn, M.-S. Kwon & S.-Y. Shin, | Wavelength tuning by photobleaching in a polymer grating-assisted codirectional coupler filter | 74 |
| M.-H. Lee, Y.H. Min, J.J. Joo, S. K. Park & J.Y. Do | Polymeric 16x16 arrayed-waveguide grating router using fluorinated polyethers operating around 1550 nm | 76 |
| Y.O. Noh, M.-S. Yang, Y.H. Won & W.-Y. Hwang | Novel voltage-controlled polymeric variable optical attenuator (VOA) | 78 |
| J.D. Love & A. Ankiewicz | Asymmetric Y-junction mode converter and wavelength demultiplexer | 80 |
| J. Canning | Controlling stress in Si/SiO ₂ -based waveguides using doped top layers | 82 |
| A.V. Rode, E.G. Gamaly, M. Samoc, A. Zakery & B. Luther-Davies | Optical properties of as-s chalcogenide films deposited by ultra-fast laser ablation | 84 |
| M. Ibsen, P. Petropoulos, R. Feded, P.C. Teh, M.K. Durkin, M.N. Zervas, | Systems applications of FBG technology | 86 |



| | | |
|--|--|-----|
| D.J. Richardson, D.N. Payne & R.I. Laming | | |
| K.K. Chow, M.W.K. Mak, C. Shu & H.K. Tsang | Widely tunable wavelength converter using a fiber ring laser with semiconductor optical amplifier | 90 |
| C. Peucheret, A. Buxens, T. Rasmussen, C. F. Pedersen & P. Jeppesen | Cascadability of fibre Bragg gratings for narrow channel spacing systems using NRZ and duobinary modulation | 92 |
| M. Jablonski, Y. Tanaka, H. Yaguchi, K. Furuki, N. Higashi & K. Kikuchi | A coupled four-cavity thin-film allpass filter for third-order dispersion compensation | 94 |
| T. Banwell | Network switching functionality: Optical vs. electronic implementations | 96 |
| C.H. Lee, H.K. Cho, S.-H. Kim, B.-J. Kim, J.-H. Koh & Y.-J. Oh | Improvement of survivability by reducing lock-in time in opaque network with bit-rates transparency | 97 |
| J.-Q. Li, H.-S. Park & B.-Y. Lee | Hybrid protection scheme of WDM ring network | 99 |
| M. Lee, Y. Lee, J. Yu, Y. Kim & J. Park | A path restoration method independent of a failure location in all-optical networks | 101 |
| C.J. Chae & R.S. Tucker | Implementation of optical self-healing ring networks over a star-configured optical cable plant using an NxN arrayed waveguide grating | 103 |
| U.C. Paek & Y. Chung | Fabrication of long-period fiber gratings with a CO ₂ laser | 106 |
| B.H. Lee | Cascaded long-period fiber gratings interpreted as a multi-slit | 110 |
| S. Lee, Y.-G. Seo, Y.-J. Kim, Y. Chung, W.-T. Han, U.C. Paek & B.H. Lee | The effect of metal coating on long-period fiber gratings | 112 |
| Y.H. Kim, B.H. Lee, Y. Chung, U.C. Paek & W.-T. Han, | Measurement method for resonant nonlinearity of ytterbium-doped optical fibers using an LPG pair | 114 |
| T.-J. Eom, N.H. Seong, D.Y. Kim, C-S. Park, U.C. Paek & B.H. Lee | OTDM signal generation using a long-period fiber grating pair | 117 |
| M. Renaud | Semiconductor optical amplifier based devices for optical burst switching | 119 |
| X. Wang & K. T. Chan | Limitation of the free-running gain-switched F-P laser for 2-D incoherent FO-CDMA application | 121 |
| R. Qu, Z. Fang, J. Geng, G. Cao, W. Zhang, G. Chen & J.P. Meunier | Design parameters investigation of FBG-external-cavity laser under high frequency modulation | 123 |
| T. Tsuzaki, M. Miyamoto, T. Okuno, M. Kakui, M. Hirano, M. Onishi, Y. Nakai & M. Nishimura | Transmission characteristics of discrete fiber Raman amplifiers employing highly nonlinear fibers | 126 |
| S.-L. Tsao, S.-C. Chiou & T-C. Lin | Wireless safeguard signal transmission through a fiber laser | 128 |
| K. Tanaka, I. Morita & N. Edagawa | 50GHz-spaced 40Gbit/s x 25WDM transmission over 480km using bandlimited RZ signals | 130 |
| S. Evangelides | The future of transoceanic Tbit/s systems | 132 |
| T. Miyakawa, I. Morita, K. Tanaka, H. Sakata & N. Edagawa | 75GHz-spaced 40Gbit/s x 25WDM unrepeated 200km transmission using low-noise fiber Raman amplifier and 170 μm ² -Aeff fiber | 133 |
| S.-B. Park & C.-H. Lee | Design of 40Gb/s WDM optical link for 600 km transmission with Raman amplifiers | 135 |
| D. Bishop | Silicon micromachines for lightwave networks | 138 |
| S. Sengupta, S. Chaudhuri & D. Saha | Reliability of optical mesh and ring networks | 139 |
| S. Choo, K. Lee, S. Kim, S. Lee & J. Park | Optical path supervisory scheme in optical cross-connect using time-slot allocation of path identifier | 142 |

| | | |
|--|--|-----|
| W.-H. So, Y.-H. Cha, S.-S. Roh & Y.-C. Kim | Offset time decision algorithm (OTDA) for guaranteeing the QoS in OBS networks | 144 |
| S.-S. Roh, K.-E. Han, W.-H. So & Y.-C. Kim | Design and performance evaluation of MAC protocol for reconfigurable WDM ring networks | 147 |
| N.G.R. Broderick, T.M. Monro, D.J. Richardson & W. Belardi | Practical applications of holey fibres | 149 |
| T.P. White, C.M. de Sterke, R.C. McPhedran & L.C. Botten | Multipole method for microstructured optical fibre calculations | 151 |
| J. Broeng, T. P. Hansen, S.E.B. Libori, E. Knudsen, A. Bjarklev & J.R. Jensen | Birefringence in photonic crystal fibers | 153 |
| N.M. Dragomir, P.M. Farrell, G.W. Baxter, A.J. Stevenson, G. Monnom, F. Brechet & A. Roberts | Investigating refractive index of photonic band gap fibres using DIC microscopy | 156 |
| J.T. Lizier & G.E. Town | Splice losses in holey optical fibres | 158 |
| E.H. Lee, S.-G. Lee & B.H. O | Microphotonics: Issues and challenges for the 21 st century | 160 |
| Y. Ohtera, T. Kawashima, Y. Sakai, I. Yokohama, A. Ozawa & S. Kawakami | Fabrication and characterization of lattice-modulated photonic crystal waveguides | 163 |
| | Withdrawn | 165 |
| M. Watanabe, H. Okayama, T. Taguchi & H. Nakajima | Wavelength demultiplexer using high-order diffraction lattice | 166 |
| D. Ross & J.S. Aitchison | Microfluidic optical switches using two non-mixing fluids in a Mach Zehnder interferometer | 169 |
| Y. Kivshar | Nonlinear bandgap waveguides | 171 |
| Y. Miyamoto, K. Yonenaga & A. Hirano | Optical modulation format for high-capacity system with ultra-high speed channels | 172 |
| Y. Akiyama, H. Ooi, T. Takahara, J.C. Rasmussen & G. Ishikawa | A comparison of performance in 40-Gbit/s NRZ, RZ, CS-RZ, and optical duobinary modulation schemes | 176 |
| W. Chujo & N. Wada | Demonstration of 10 Gbit/s x 40CDM x 2OTDM x 4WDM hybrid transmission over 100km with 0.42 bit/s/Hz spectral efficiency for the multi-tera bit high granularity photonic network | 178 |
| A. Agata, K. Tanaka & N. Edagawa | Study on optimum Reed-Solomon code for 40Gbit/s-based ultra long-distance WDM transmission | 181 |
| S. Kuwahara, K. Yonenaga, Y. Miyamoto, K. Murata, H. Kitabayashi, N. Shimizu & H. Tuba | 43-Gbit/s, 200-km unrepeated transmission experiment using high-sensitivity digital OEIC receiver module | 183 |
| M. Kang | Korean activities of optical internet research and development | 185 |
| K. Onohara, N. Wada W. Chujo & K.-I. Kitaymna | Optical code-based IP longest prefix match using variable-length optical gate | 186 |
| L.R. Nunes D. Santoso, S. Sugawara, N. Kishi & T. Miki | A novel photonic network architecture with dynamic bandwidth assignment for packet-based next generation internet | 188 |
| X. Wang, A. Saito, H. Morikawa & T. Aoyama | Distributed wavelength assignment algorithm for optical bursts in WDM networks | 191 |
| J. Yamawaku, W. Imajuku, A. Takeda, S. Okamoto & T. Morioka | Investigation of virtual grouped-wavelength-path routing networks | 194 |
| P.St.J. Russell, J.C. Knight, W. J. Wadsworth, B.J. Mangan & T.A. Birks | Photonic crystal fibres conducting light through holey cages and glass sieves | 197 |
| S.K. Lyu, S.B. Lee, S.S. Choi & K.M. Cho | A new modulation phase shift method of dispersion measurement using AOM and I/Q demodulator | 199 |



| | | |
|---|--|-----|
| K. Kawabata, Y. Ishizuwa & M. Imai | Simultaneous determination of zero-dispersion wavelength and nonlinear refractive index in a dispersion-shifted fiber by four-wave mixing | 201 |
| E. Ampem-Lassen, A. Roberts & S.T. Huntington | High resolution optical fiber refractive index profiling using near-field scanning optical microscopy | 204 |
| S. Yamashita & R. Hayashi | Measurement of fiber chromatic dispersion using a mode-locked fiber laser | 206 |
| D. Wolfson, T. Fjelde & A. Kloch | SOA-based devices for all-optical wavelength conversion and regeneration | 208 |
| Y. Shibata, N. Kikuchi, S. Oku, T. Ito, H. Okamoto, Y. Kawaguchi, Y. Kondo & Y. Suzuki | Filter-free wavelength conversion using a Sagnac interferometer integrated with parallel amplifiers structure (SIPAS) | 212 |
| Y.-S. Cho, S. Kim & W.Y. Choi | A new wavelength converter with tunable output wavelength based on a self-seeded Fabry-Perot laser | 214 |
| T. Fjelde, A. Kloch, D. Wolfson, B. Dagens, R. Brenot, E. Roux, F. Gaborit, F. Poingt & M. Renaud | Simultaneous 2x10 to 20 Gbit/s time-division multiplexing and wavelength conversion using an integrated SOA-based Mach-Zehnder interferometer | 216 |
| M.I. Hayee | High-spectral-efficiency long-haul systems | 219 |
| T. Stephens | Aspects of long-reach optical transmission and/or related topics | 220 |
| Y. Yamada, H. Taga & K. Goto | An experimental study of dispersion managed transmission line for 10Gbit/s based long haul DWDM system | 221 |
| J.B. Leroy, P. Marmier, C. Le Flao, A. Fagon, P. Plantady, C. De Barros & O. Sachot | Long haul high capacity transmissions over non zero dispersion shifted fiber | 223 |
| Y.C. Chung | Optical fiber networks for wireless personal communication service | 225 |
| A. Nirmalathas, C. Lim, D. Novak, R.B. Waterhouse & D. Castleford | The merging of photonic and radio technologies | 227 |
| R. Watanabe, Y. Horiuchi & M. Suzuki | Eight-channel WDM optical if transmission experiment for 22GHz-band fixed wireless access system | 231 |
| I. Seto, T. Tomioka & S. Ohshima | The effect of mode partition noise on radio-on-fiber systems with Fabry-Perot lasers for IMT-2000 | 234 |
| Y.C. Youk, K.W. Park, Y. Park, U.C. Paek & D.Y. Kim | Nano-aperture scanning | 236 |
| B.M.A. Rahman, T. Wongcharoen & K.T.V. Grattan | Symmetrical beam-former for efficient laser-fiber coupling | 238 |
| D Menashe, M. Tur & Y. Danziger | A simple method for measuring chromatic dispersion of high order modes in optical fibers | 240 |
| L.R. Jaroszewicz, R. Swillo & A. Kiezun | Fiber-optic Sagnac ellipsometer | 242 |
| R. Zheng & R.A. Minasian | Optical source coherence control for noise suppression in photonic signal processors | 245 |
| K.K. Gupta, N. Onodera, K.S. Abedin & M. Hyodo | Generation of highly-stabilised, higher-order optical pulses in am mode-locked fibre ring lasers using optical filtering via intra-cavity Fabry-Perot etalon | 248 |
| T. Kato | Hybrid photonics integration technology for photonic packet switching application | 250 |
| Y. Yang & H.F. Liu | Optical clock frequency division-by-four based on nonlinear dynamics of semiconductor lasers and optoelectronic feedback | 251 |



| | | |
|--|--|-----|
| S.H. Jeong, T. Mizumoto, K. Nakatsuhara, M. Takenaka & Y. Nakano | Nonlinear GaInAsP DFB waveguide for polarisation independent all-optical switching | 253 |
| M.W. Austin | Wideband lithium niobate integrated optical modulators | 256 |
| B. Dany, B. Lavigne & O. Leclerc | Optical 3R regeneration | 258 |
| G. Mohs, L.D. Coelho, E. Gottwald, C. Scheerer, C. Furst, A. Faerbert & C. Glingener | Optimized inline dispersion compensation for self-phase modulation limited transmission | 262 |
| J. Tang | Channel capacity calculation of a nonlinear optical fiber and an analytical solution to the non-linear Schroedinger equation by the Volterra method | 264 |
| T. Tokle, C. Peucheret, J. Seoane & P. Jeppesen | Transmission of 1.8 and 4.8 ps RZ signals at 10 Gbit/s over more than 2700 km of a dispersion managed link made of standard and inverse dispersion fibre | 266 |
| Y. Lee, Y. Kim, M. Lee, J. Yu & J. Park | Estimation of modulation instability effects in standard single-mode fiber based optical systems | 268 |
| K. Hotate & M. Tanaka | High-resolution distributed fiber Brillouin strain sensing | 271 |
| M. Vasiliev, A.J. Stevenson & S.F. Collins | Low coherence interferometric strain and temperature sensing using a triple-wavelength synthesised source | 275 |
| A. Eyal & M. Tur | Polarization mode dispersion effects in fiber sensors | 278 |
| P. Blazkiewicz, W. Xu & S. Fleming | Poling of optical fibres | 282 |
| Y. Ouchi, M. Fukasawa, D. Tanaka, K. Nishide & A. Wada | Polarization-maintaining WDM fiber coupler and high efficiency pump module for PM-EDFA | 286 |
| Y.-B. Lu & P.L. Chu | Add-drop multiplexer using a dual-core fibre for WDM networks | 288 |
| A. Ueda, S. Set, M. Jablonski & K. Kikuchi | Layered optical thin-film design using an inverse scattering method | 290 |
| R.H. Chu & G. Town | Improved birefringent filter design using digital filter algorithms | 292 |
| S. Cao | Micro-optic integration for advanced networks | 294 |
| M. Samoc, A. Samoc, A. Rode & B. Luther-Davies | Short laser pulse induced nonlinear optical phenomena in novel materials and structures | 295 |
| S.-C. Cho, B.-M. Jung & B.-G. Kim | A novel vertical directional coupler switch with switching operation induced and extinction ratio enhanced sections | 298 |
| O.-H. Park, J.-I. Jung & B.-S. Bae | Fabrication of planar lightwave circuit using photochemical self-developing of sol-gel hybrid glass | 300 |
| F. Tong, L.Y. Chan, C.K. Chan & L.K. Chen | Applications of injection locked FP laser in WDM networks | 302 |
| | Withdrawn | 306 |
| K.-U. Chu & C.-H. Lee | A novel method enhancing the resolving power of tunable optical filters for accurate channel power measurement in dense WDM systems | 307 |
| H.T. Yamada, H. Yurai & K. Fujii | 80-Gbit/s authentic OTDM MUX transmitter using reflective EAMs | 309 |
| I.M. Bassett & J.H. Haywood | Optical fibre current sensors, ideas and practice | 311 |
| Y.-G. Han, B.H. Lee, W.-T. Han, U.-C. Paek & Y. Chung | Sensing applications of long-period fiber gratings with resonant peak splitting | 315 |

| | | |
|---|---|-----|
| B.C. Gibson, J.D. Love, L.W. Cahill & D.M. Elton | Analysis of a thin film coating on a fibre taper for evanescent field sensing | 317 |
| J. Kenney | Spectrometer on a clip | 320 |
| K.S. Chiang | Fibre devices | 321 |
| J. Canning, S. Huntington, S. Sommer & A. Carter | Fresnel lenses fabricated directly onto fibre tips | 322 |
| M.S. Lee, I.K. Hwang & B.Y. Kim | Acousto-optic tunable bandpass filter | 324 |
| K. Asano, T. Nakamura, K. Nishiwaki, N. Momotsu, T. Matsuura & H. Hosoya | High extinction ratio polarization maintaining pump/signal multiplexer with excellent temperature stability | 326 |
| H.S. Seo, K. Oh, U.-C. Paek & K.H. Kim | All optical variable attenuator based on stimulated Raman scattering and its application in compensation of Raman crosstalk | 328 |
| S.H. Law | Photonics packaging | 331 |
| Y. Kuhara, H. Nakanishi, T. Okada, J. Shinkai, A Yamaguchi & N. Yamabayashi | A small size and low cost polymer straight-waveguide transceiver for 1.3/ 1.55 μ m single fiber bi-directional data-links | 335 |
| S. Uchiyama, N. Yokouchi, M. Iwase, T. Hama & Y. Shiina | P-substrate VCSEL array for passive-aligned module | 337 |
| T. Mizumoto, H. Yokoi & M. Shimizu | Demonstration of semi-leaky isolator fabricated by wafer bonding of magnetic garnet and lithium niobate | 339 |
| T. Nakatogawa, A. Okamoto & K. Sato | Multiplicity of free space WDM system with photorefractive connection module | 341 |
| H. Izadpanah, K. Sayyah & F. Dolezal | All wireless RF/optical WDM access network system technology | 344 |
| K. Clarke, K. Hinton & J. Turner | Considerations for the histogram approach to optical performance monitoring | 346 |
| S. Nishimura, T. Kudoh, H. Nishi, K. Harasawa, S. Fukuda, Y. Shikichi & S. Akutsu | High-throughput network switch for RHiNET-based optically interconnected distributed parallel computing system | 349 |
| S. Kozaki, M. Ishikawi, M. Satoh, Y. Asashiba, H. Kondoh & H. Ichibangase | A burst-mode bit synchronization method for ATM-PON | 351 |
| Y.-B. Lee, Y.-W. Lee, M.-M. Lee, J.-T. Yu & J.-W. Park | A propagation-parameter mapping method for efficient simulation of In-line amplified WDM transmission systems | 353 |
| | Withdrawn | 355 |
| K.-W. Jeong, S.H. Ahn, J.-R. Lee S.W. Yi & J. Eom | Optical ATM cell decompressor using gain-transparent SOA switch | 356 |
| J.Y. Choi, S.-Y. Oh & M. Kang | MPLS control plane architecture for optical burst switching | 358 |
| K.K.F. Chang, L.N. Binh, G. K. Cambrell & K.P. Dabke | Nonlinear frequency domain modeling of optical fiber transmission system by Volterra series | 360 |
| T. Kaino, A. Okamoto, Y. Nakanishi & K. Sato | Experiment of fault tolerant all-optical routing device with two-wave mixing | 363 |
| P. Kim, H. Yoon, J.-E. Seo, K.-W. Ryoo, J. Blow, S. Fleming & N. Park | Novel in-service monitoring system for the optically amplified WDM transmission link by optical time domain reflectometry | 365 |
| K.I. Yamada, M. Masuda, T. Kudou, T. Ozeki, H. Sotobayashi & W. Chujo | Simultaneous adaptive PMD equalization in 9 x 40 Gbit/s WDM transport networks | 367 |
| H. Yoo, Y.O. Noh, J.M. Shin & Y.H. Won | The influence of wavelength mismatch in 2-D optical CDMA systems using multiple fiber Bragg gratings | 369 |



| | | |
|--|--|-----|
| T. Hashiguchi, X. Wang, H. Morikawa & T. Aoyama | CoS-oriented wavelength assignment algorithm in burst switching optical networks | 371 |
| S.J.B. Yoo, H.J. Lee, S. Vaidianathan, K. Okamoto & S. Kamei | Demonstration of high-speed optical-label switching and routing by tunable wavelength conversion and uniform loss cyclic frequency AWG | 374 |
| J. Eom, S.D. Cho, S.T. Lee & H. Park | A case study on the integrated routing in IP over WDM networks | 376 |
| M.W.K. Mak & H. Tsang | Accurate determination of Laplacian pulse width of ultrashort optical pulses | 378 |
| J.C. Yi, J.H. Lee, J.Y. Kim & T.K. Yoo | Investigation of the external feedback effects on the relative intensity noise characteristics of 650nm laser diodes | 380 |
| H. Inayoshi, S. Yagi, S. Nagai & K. Utaka | Analysis and fabrication of current-defined multi-mode interference photonic switches with partial-index modulation regions (MIPS-P) | 382 |
| T. Katsuyama, K. Hosomi & M. Shirai | Temperature dependence of Mach-Zehnder light modulators using polariton propagation | 384 |
| S. Honma & A. Okamoto | Resonant state switching with photorefractive enhanced semi-linear configuration, and it's applications | 386 |
| H. Funakoshi, A. Okamoto, Y. Takayama & K. Sato | Thresholding property of nondestructive reversal memory with photorefractive crystal | 389 |
| K. Taguchi, M. Tanaka & M. Ikeda | Proposal of optical fiber trapping in space | 392 |
| M. Toishi, A. Okamoto, S. Honma & M. Bunsen | Optimization of beam intensities for high efficient fault-tolerant holographic memory | 394 |
| H. Nihei & A. Okamoto | Proposal of optical multifunctional device composed of an atomic system placed within photonic crystals | 397 |
| L.N. Binh | Wideband integrated wavelength selective packet optical filters | 399 |
| S.-T. Kim, H.-J. Kim & B.-G. Kim | Comparison of facet reflectivity of buried channel waveguides using the angular spectrum method and the field profiles obtained by various methods | 402 |
| S.-L. Tsao, Z.-H. Tine & Y.-J. Jou | BPM simulation on a vertical coupling optical switch based on SOI structure | 404 |
| W.-S. Ji, D.-C. Kim, J. Jeong, S.G. Lee, B.H. O & E.-H. Lee | Observation of evanescent field from the waveguide with liquid cladding by the near-field scanning optical microscope | 406 |
| R. Jarvis & J.D. Love | Spot size expander using UV-trimming of trilayer photosensitive fibres | 408 |
| N.N. Akhmediev, J.M. Soto-Crespo & G. Town | Self-starting of passively mode-locked fiber lasers: CW versus pulse regime | 410 |
| J. Canning | Properties of "cladding mode" waveguides and their use in switching | 412 |
| W. Shin, U.-C. Ryu & K. Oh | The impact of pump-signal WDM couplers on long wavelength band erbium doped fibre amplifier | 414 |
| X. Xue, A. Kirk & H. Wei | Beam analysis via fractional Fourier transform | 416 |
| J. Yu, K. Oh & I. Kwon | The impact of core radius on the Brillouin gain spectra of GeO ₂ -doped single-mode optical fibers | 417 |
| J.H. Song, K.S. Lee & J.W. Lee | Investigation of enhanced photosensitivity of silica based fibers by hydrogenation | 419 |

| | | |
|--|---|-----|
| J.J. Park, J.W. Jeong, S.R. Park, S.G. Lee & E.-H. Lee | Observation and analysis of whispering-gallery-mode in microspheres by use of an etch-eroded fiber coupler | 421 |
| S.-L. Tsao, S.-C. Chiou & Y.-Z. Lee | Study of a coupled fiber ring laser | 422 |
| S.R. Park, S.G. Lee, E.-H. Lee, B.H. O, D. Woo & S. Kim | Application of a taper design method for spot-size converter integrated laser diodes | 425 |
| J.K. Kim, B. Kang, S.G. Lee, B.H. O & E.-H. Lee | Improvement of 3-dimensional beam propagation method by combining the implicit and the explicit methods | 427 |
| H. Ryoo, J.W. Jeong, J.M. Hong, S.G. Lee, B.H. O & E.-H. Lee | Optical properties of photodefinable polyimide and their application to polarization splitter | 429 |
| M. Yan, J. Chen, W. Jiang, J. Li, J. Chen & X. Li | Novel design scheme for balanced pre- and post-multiple-pump Raman fiber amplifiers using simulated annealing algorithm | 431 |
| S.-L. Tsao S.-C. Chiou & C.-Y. Hsu | Application of an optical circulator included fiber laser in CATV system | 433 |
| Y. Koyamada | Core-mode to radiation-mode coupling in long-period fiber gratings | 435 |
| S. Oh, K. Kim, S. Cha & J. Kim | The study on the diameter fluctuation of optical fiber and furnace design | 437 |
| S. Lee, S. Kim, K. Lee, B. Kang, S. Lee & J. Park | All-optical logic XNOR based on Mach-Zehnder interferometer | 439 |
| S. Kim, B.-S. Choi, S. Park, S. Jo & K.-H. Lee | Highly-stabilized all optical gain clamping of WDM EDFA having the reduced relaxation oscillation | 441 |
| S. Kim, S. Lee, S.-H. Kim, S. Lee & J. Park | All optical binary full adder using SLALOMs | 444 |
| Y. Zhu, P.L. Swart & B.M. Lacquet | Device for concatenation of phase-shifted long-period grating with normal long-period grating and its application as gain-flattening | 446 |
| Y. Zhu, B.M. Lacquet & P.L. Swart | Novel design and modelling of wavelength-tunable optical add/drop multiplexer using long-period gratings and fibre stretchers | 448 |
| S. Ahn, S.P. Han, C.K. Choi, M.Y. Jeong & T.G. Choy | 8-channel polymeric optical fiber arrays for PLC devices packaging | 451 |
| T. Wolinski, A. Szymanska & A. Domanski | Polarization phenomena in liquid crystal-core optical fibers | 453 |
| C. Paye, R. Stolen & J.D. Love | Surface loss effects in w-fibre transmission beyond the fundamental mode cutoff wavelength | 455 |
| S. Nakamura, Y. Koyamada, N. Yoshida, N. Karasawa, H. Sone, M. Ohtani, Y. Mizuta, R. Morita & M. Yamashita | FDTD calculation with all parameters of Sellmeyer fitting equation and all nonlinear effects including Raman response for 12-fs laser pulse propagation in a silica fiber | 457 |
| K. Kolossovski, A.V. Buryak & R.A. Sammut | Quasisolitons due to parametric four-wave mixing | 460 |
| L.N. Binh & S. Zheng | Nonlinear asymmetric fibre-slab couplers | 462 |
| V.I. Kruglov, A.C. Peacock, J.M. Dudley & J.D. Harvey | Wings of parabolic pulses in optical amplifiers: Theory and numerical results | 465 |
| M.A. Magana-Cervantes & J.S. Aitchison | All-optical and XOR logic gates in a single device | 467 |
| C.M. de Sterke, E.N. Tsoy & J.E. Sipe | Four-wave mixing in a non-uniform fiber grating | 469 |
| M. Nishimura | New generation optical fibers for wideband DWDM transmission | 471 |



| | | |
|--|--|-----|
| H. Hakozaiki, J. Zhou, K. Hogari & K. Sato | Optical cable loss characteristics of 1.3- μ m zero-dispersion SM optical fiber for WDM system | 474 |
| K. Mukasa, T. Yagi & K. Kokura | Wide-band transmission line with low-loss negative medial dispersion fiber (N-MDF) | 476 |
| J.U. Jeon, Y.T. Lee & K.T. Jeong | Dispersion flattened fiber with high negative dispersion | 478 |
| R. Sugizaki, K. Mukasa & T. Yagi | Optimization of slope compensating DCF for S-band | 480 |
| D.D. Sampson, B.A. Patterson & J.J. Armstrong | Some in vivo biomedical applications of optical fibre sensors | 482 |
| F. Marquis-Weible, C. Philipona, L. Vaccaro, M.-P. Bernal, C. Duschl & H. Sigrist | Biological applications of scanning near-field optical microscopy | 486 |
| I. Towers & B.A. Malomed | Stable (2+1)D spatial solitons in a layered medium with Kerr nonlinearity | 490 |
| W. Krolikowski, G. McCarthy, B. Luther-Davies, D. Neshev, A. Desyatnikov, E.A. Ostrovskaya, Y.S. Kivshar, J.J. Garcia-Ripoll & V.M. Perez-Garcia | Multipole spatial vector solitons | 492 |
| R.G. Dall, M.D. Hoogerland, K.G.H. Baldwin & S.J. Buckman | Atom optics and single-mode fibres | 494 |
| S. Yoo, U.-C. Paek & W.-T. Han | Development and optical properties of novel optical fibers containing cobalt doped ZnO-Al ₂ O ₃ -SiO ₂ glass-ceramic crystals | 497 |
| V. Rastogi & K.S. Chiang | Segmented cladding fibre for widely extended single-mode operation | 499 |
| H. Jeong, K. Oh, S. Seo, S. Choi & W. Shin | A new Nd-doped large core double clad fiber laser cavity adiabatically tapered at both ends | 501 |
| W. Lee, H.S. Seo, W.J. Shin, K.R. Kim & K. Oh | Achievement of uniform attenuation from 1250 to 1600 nm using a new three-layered Co ²⁺ doped optical fiber | 503 |
| B. Bakhshi | Erbium fiber ring lasers and their applications in ultrahigh speed fiber-optic transmission | 505 |
| H.C. Bao, H.F. Lui, Y.J. Wen & A. Nirmalathas | Reduction of amplitude modulation in a subharmonically mode-locked semiconductor laser using a feed-forward technique | 509 |
| H. Sanjoh, K. Tsuzuki, I. Tomita, M. Ishikawa & Y. Yoshikuni | Time domain filtering to improve signal to noise ratio in pulse-type multiwavelength light source | 511 |
| L.A. Bui, A. Mitchell & R.B. Waterhouse | Analysis of an integrated photonic phasing network | 513 |
| H. Kawaguchi & Y. Ito | Waveforms of sub-picosecond optical pulses generated by spectral filtering | 516 |
| M.J. Withford, D.J.W. Brown, D.W. Courts & J.A. Piper | Invited recent developments in UV-copper lasers for optical fibre processing | 518 |
| A. De Francesco & G.E. Town | Optimising second harmonic in germanosilicate optical fibre during thermal poling | 520 |
| P. Blazkiewicz, W. Xu & S. Fleming | Effect of scan-rate on CO ₂ laser assisted poling | 522 |
| P. Blazkiewicz, W. Xu & S. Fleming | Effect of power fluctuations on CO ₂ laser assisted poling | 524 |
| M.A. van Eijkelenborg, J. Zagari & L. Poladian | Optimising holey fibre designs | 526 |
| J. Grochocinski | Optical fibers for ultra-large capacity transmission | 528 |



| | | |
|---|--|-----|
| Y. Namihira & A. Robayo | ITU-T nonlinear coefficient round robin measurements for various optical fibers in Japan | 532 |
| T. Hayano, O. Kato, T. Takemyou, T. Shimomichi, K. Oohashi & M. Miyamoto | Development of thin optical fiber cords with a halogen-free jacketing material | 534 |
| A. Yamasaki, N. Okada & M. Miyamoto | PMD characteristics of the helical and sz slotted core cables with 4-fiber ribbons | 536 |
| | Withdrawn | 538 |
| H. Zhu, G. Liu, B. Chen, J. Zhang, X. Wang & W. Wang | AlGaInAs MQW DFB-LD for 1.51 μ m - 1.58 μ m | 539 |
| T. Miyamoto, M. Kawaguchi, E. Gouardes & T. Kondo | Low threshold operation of MOCVD grown GaInNAs lasers with GaInAs intermediate layer inserted QWS | 541 |
| M. Miyashita, M. Sasaki, Y. Sakamoto, K. Ono, T. Yagi & E. Omura | High-power operation of low-operating-current 660nm laser diodes for DVD-RAM/RW | 543 |
| N. Ueda, M. Tachibana, N. Iwai, T. Shinagawa, Y. Sasaki, M. Ariga & T. Hama | Improvement of temperature characteristic in 850nm oxide confined VCSEL using AlAs/Al _{0.2} Ga _{0.8} As DBR | 545 |
| Y.-K. Seo, J.-H. Seo & W.-Y. Choi | Enhancement of locking bandwidth in DFB lasers by side-mode injection-locking | 547 |
| M. Arai, S. Murata & K. Oe | Characteristics of light emission and detection diode using lateral current injection laser in optical access network | 549 |
| R.S. Tucker & D.M. Baney | Noise figure: Theory and application | 551 |
| C.J. Youn, S.K. Shin, K.J. Park & Y.C. Chung | A simple Q measurement technique using receiver noise | 552 |
| S.-T. Lee, S.-D. Cho, J.-H. Eom & H. Park | Analysis on the penalty due to imperfect isolation of Mach-Zehnder interferometer consisted in bidirectional optical amplifier | 554 |
| A. Okayasu, E. Shibano, N. Yoshikane, H. Taga & K. Goto | Active tracking for optimum decision threshold | 556 |
| K. Hinton | Metricising dispersion ripple | 558 |
| R. Minasian & K. Alameh | Photonic signal processing systems | 561 |
| Y. Imai & T. Tamura | Chaos synchronization in optical fiber ring resonator for secure communication | 566 |
| K. Ema, J. Ishi, H. Kunugita & T. Kondo | Serial-parallel conversion of high-speed optical bit stream by highly efficient nonlinear materials | 568 |
| K.H. Kim, Y.G. Choi & D.H. Cho | New fibre materials for wideband optical amplifiers | 571 |
| S. Yamashita & J. Nishijima | Gain and noise performances of a L-band erbium-doped fiber amplifier incorporating an inline C-band fiber grating laser | 573 |
| H. Yokota, K. Kamoto, J.-I. Igarashi & Y. Sasaki | EDFA gain monitoring by ASE level detection using optical fiber grating coupler | 575 |
| T. Segi, T. Aizawa, T. Sakai & A. Wada | Silica-based composite fiber amplifier with 1480 - 1560 nm seamless gain-band | 577 |
| Y.G. Choi, D.H. Cho, B.J. Park, K.H. Kim, S.H. Park & J. Heo | Er ³⁺ /Ce ³⁺ -codoped tellurite glasses for EDFA with enhanced 980-nm pump efficiency | 579 |
| K. Tsuzuki, S. Kondo, Y. Noguchi, R. Iga, S. Oku, T. Yamanaka & H. Takeuchi | Polarization-independent, loss less SOA integrated EA modulator with Fe-doped InP buried InGaAlAs MQW | 581 |

| | | |
|--|--|-----|
| H. Yokoi, T. Mizumoto, H. Masaki, N. Futakuchi, T. Ohtsuka & Y. Nakano | Selective oxidation of AlInAs layer grown on InP for enhancement of magneto-optic effect in optical isolator | 583 |
| B.M.A. Rahman, S.S.A. Obayya, N. Somusiri & K.T.V. Grattan | Design of ultra-compact polarization rotators using slanted sidewalls | 585 |
| J. Shim, Y. Eo & S. Arai | Advantages of distributed reflector (DR) LDs integrated with electro-absorption modulator | 587 |
| Themistos, B.M.A. Rahman, & K.T.V. Grattan | Interference mechanisms in MML-based 3dB power splitters on deeply etched InP | 589 |
| M. Kato & Y. Nakano | Wavelength and material dependence of photo-induced phase shift in multiple-quantum-well electro-absorption modulators | 591 |
| K. Parameswaran, J. Kurz, R. Roussev, M.-H. Chou, I. Broner, S. Kawanishi & M.M. Fejer | Nonlinear waveguides for wavelength and time domain signal processing | 593 |
| Y. Yamamoto, A. Maruta & K.-I. Kitayama | A quantization scheme based on soliton phenomena for all-optical analog-to-digital conversion | 595 |
| S. Tsai & R.J. Mears | Comparison of dispersion characteristics between lattice-form FIR filters and parabolic arrayed waveguide gratings | 597 |
| K. Tanaka, K. Takano, K. Kondo & K. Nakagawa | Characteristics of fiber-optic SSB modulation using optical Hilbert transformer | 600 |
| M. Attygalle, H.F. Liu & A. Nirmalathas | All-optical harmonic clock signal generation through injection locking of passively modelocked semiconductor lasers | 602 |
| V.I. Kruglov, A.C. Peacock | Self-similar dynamics of smooth pulses in optical amplifiers with anomalous group-velocity dispersion | 605 |
| K.Y. Wong, M.E. Marhic, K. Uesaka & L.G. Kazovsky | Polarization-independent fiber optical parametric amplifier | 609 |
| S. Coen, D.A. Wardle & J.D. Harvey | Measurement of the anti-Stokes growth in stimulated Raman scattering under non-phase-matched conditions | 611 |
| A. Sukhorukov & N.N. Akhmediev | What is the maximum achievable peak intensity of a multi-soliton complex | 613 |
| S. Coen, A.H.L. Chau, R. Leonhardt, J.D. Harvey, J.C. Knight, W.J. Wadsworth & P.St.J. Russell | Experimental and theoretical analysis of supercontinuum generation in a photonic crystal fiber pumped with 60 ps pump pulses | 615 |
| H. Suzuki, N. Takachio, H. Masuda & K. Iwatsuki | Broadband Raman amplification and its application in optical transmission systems | 617 |
| T. Miyamoto T. Tsuzaki, M. Kakui & Y. Nakai | Accurate estimation of Raman gain coefficient over 70nm bandwidth | 621 |
| F. Ahmed, L.R. Nunes & N. Kishi | All-optical signal inversion using stimulated Raman scattering | 624 |
| H. Sakata, T. Miyakawa & N. Edagawa | Noise performance of distributed fiber Raman amplifiers | 626 |
| J.L. Blows, M. Farahmand, S. French, M. de Sterke & S. Fleming | Nonlinear fibre development for ultra broadband optical parametric amplifiers | 628 |
| J. Jacquet, A. Leroy, G.-H. Duan & H. Helmers | Low cost WDM lasers for MAN applications | 630 |
| K. Tsuruoka, T. Okuda, Y. Muroya, N. Suzuki, K. Mori & T. Nakamura | 4-channel DFB-LD array for 1.3- μ m CWDM systems | 632 |

| | | |
|---|--|-----|
| C.B Kuznia, D.J. Albares, M. Wong, M. Pendleton, P. Bachta, T. Le, S. Thai, M. Englekirk, J. Cable & R.E. Reedy | Integration of optoelectronic devices with silicon-on-sapphire circuits for parallel optical interconnects | 634 |
| D. Inniss | WDM components for Raman amplifiers | 636 |
| | Post-deadline papers | |
| M. Ishii, A. Takagi, Y. Hida, M. Itoh, S. Kamei, T. Saida, Y. Hinino, A. Sugita & k. Kitagawa | Low-loss silica-based 256-channel arrayed-waveguide grating multiplexer using cascaded spot-size converter | |
| H. Suzuki, M. Fujiwara, N. Takachio & K. Iwatsuki | 12.5 GHz-spaced, 1.28-Tb/s (512-channel x 2.5 Gb/s) super-dense WDM transmission over 320-km SMF using multi-wavelength generation technique | |
| S.T. Huntington, J.D. Love, S. Law & D. Thorncraft | A self-aligning fibre-to-waveguide pigtail technique | |
| A.V. Tran, D.D. Zhong, R.S. Tucker & K. Song | Novel reconfigurable multichannel optical add-drop multiplexers using fibre Bragg gratings and circulators | |
| H. Ooi, T. Takahara, Y. Akiyama, G. Ishikawa, Y. Sakata, H. Okada, S. Wakana, Y. Kawahata, H. Isono & N. Mitamura | 40-Gbit/s x 32 ch automatic dispersion compensation with VIPA variable dispersion compensators | |
| Y. Nasu & S. Yamashita | Multiple-phase-shift superstructure fiber Bragg gratings (MPS-SSFBG's) for dense WDM systems | |
| A. Canagasabey, W. Xu, P. Blazkiewicz & I. Bassett | Extended lifetime of the electro optic coefficient in poled silica fibres | |
| M. A.Englund, S.W. Lovseth, D.Y. Stepanov & E.C. Magi | Selective gain tuning in erbium doped fibres | |
| S. Kim, S. Park, S. Jo & K.-H. Lee | Impacts of FBG's reflectivity on gain and noise figure of GL-EDFA with FBG pairs | |
| M.K. Abd-Rahman & H. Ahmad | Brillouin/erbium fiber laser pumped with FBG laser sharing the same EDF | |
| J.B. Eom, K. W. Park, T.-J. Eom, Y. Chung, W.-T. Han, U.C. Paek & B.H. Lee | Transmission and numerical aperture measurement of photonic crystal fiber | |

*AOS provides this document as a service to the community, but accepts no responsibility for any errors it might contain

